



Justrite Safety Group

# 556 - CUSHION-EASE<sup>®</sup> SOLID

PRODUCT INFORMATION BROCHURE








For over 70 years, the name Notrax<sup>®</sup> has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax<sup>®</sup> offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax<sup>®</sup> offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**

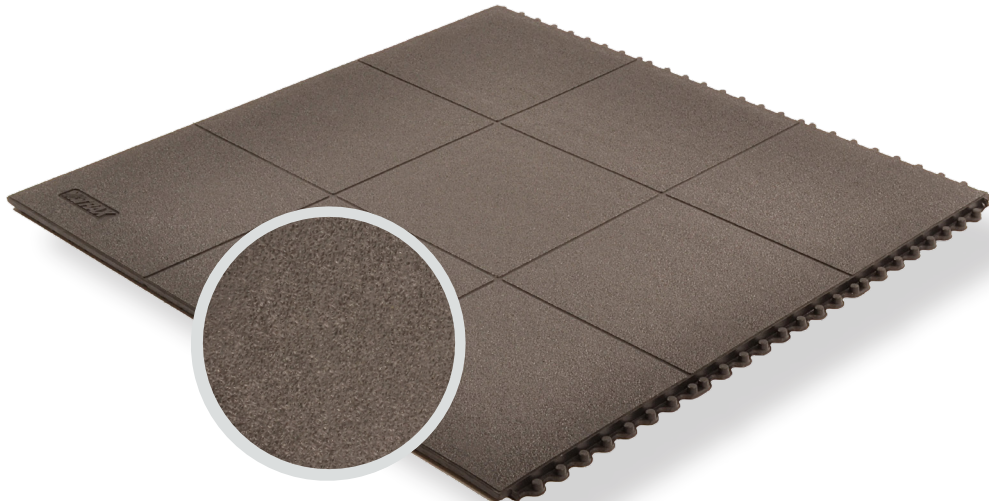

**556 - CUSHION-EASE® SOLID** is a modular anti-fatigue matting system made with a resilient rubber compound with a solid top anti-slip surface texture and a multi-nib backing for comfort and ergonomic support of the mat. The solid-top design of Cushion-Ease® Solid has an anti-slip surface texture for added traction and is easy to clean. All Cushion-Ease® mats have a male/female interlocking system and are compatible with Notrax® M.D. Ramp System® for easy on-site custom configurations and trip-resistant platforms.

**Material:** Natural Rubber

**Features and Benefits:**

- Resilient rubber compound and unique support design offers exceptional fatigue relief
- Solid top design with an anti-slip surface texture is easy to clean
- Easy to snap together mats on-site for custom work station platforms
- Rubber compound is grease resistant
- Compatible with any Cushion-Ease® family mats
- 551 M.D. Ramp System® and 552 extra wide M.D.-X Ramp System™ available

**⚠ WARNING:** This product can expose you to chemicals including diisodecyl phthalate which is known to the State of California to cause birth defects or reproductive harm, and 2-mercaptobenzothiazole which is known to the State of California to cause cancer. For more information, visit [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



MODEL: 556

## SPECIFICATIONS


|             |  |
|-------------|--|
| Stock Sizes | 3'x3'  |
| Thickness   | 3/4"   |
| Colors      | <br>Black |

**Performance:**

|                          | Good  | Better | Best | Superior  |
|--------------------------|---|--------|------|---|
| Wear Resistance          |  |        |      |  |
| Anti-fatigue Performance |  |        |      |  |
| Slip Resistance          |  |        |      |  |

**APPLICATIONS**

- Workstations
- Packaging Areas
- Assembly Lines
- Welding Areas

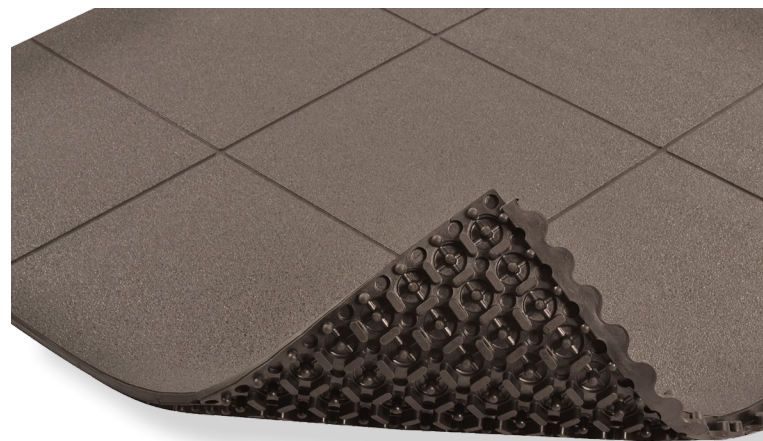

Anti-Fatigue    Anti-Slip    Cleaning    Modular System



# TESTING DATA

| Test                                     | Test Description  | Results  |
|--|---|--|
| Compression Deflection                   | Test specimen is subjected to varying compression load levels and the resulting deflection was measured. The greater the deflection, the better the anti-fatigue properties. (Inches)     | .063" (20 lbs/sq. inch)<br>.112" (40 lbs/sq. inch) |
| Coefficient of Friction<br>ASTM C1028-96 | A neolite heel assembly with a predetermined load is pulled horizontally with a dynamo meter to measure the force required to cause the assembly to slip.                                 | .83  |
| Abrasion Resistance<br>ASTM D3884-01     | Test specimen is subjected to the rubbing action of two abrading wheels under controlled conditions. Results measured in Weight loss (Grams)  | 12.32 Grams (9.4%)                                 |
| Elongation<br>ASTM D412                  | Test specimen is stretched at a specified rate until breaking point. The results are measured in weight needed to break, and % of size increase at breaking point.                        | 116.5 lbs<br>241.3%<br>(average of 5 specimens)    |
| Hardness<br>ASTM D2240-02                | The hardness of a test sample is measured by means of a type A Shore Durometer. It measures the penetration of its specified indenter forced into the material under specified conditions | 67   |

\*Testing performed by an independent test laboratory.

## NOTRAX®


5655 West 73rd Street  
Chicago, IL 60638

**PHONE:** (800) 621-2802

**FAX:** (800) 322-7105

**EMAIL:** saleschicago@checkers-safety.com

www.notrax.com

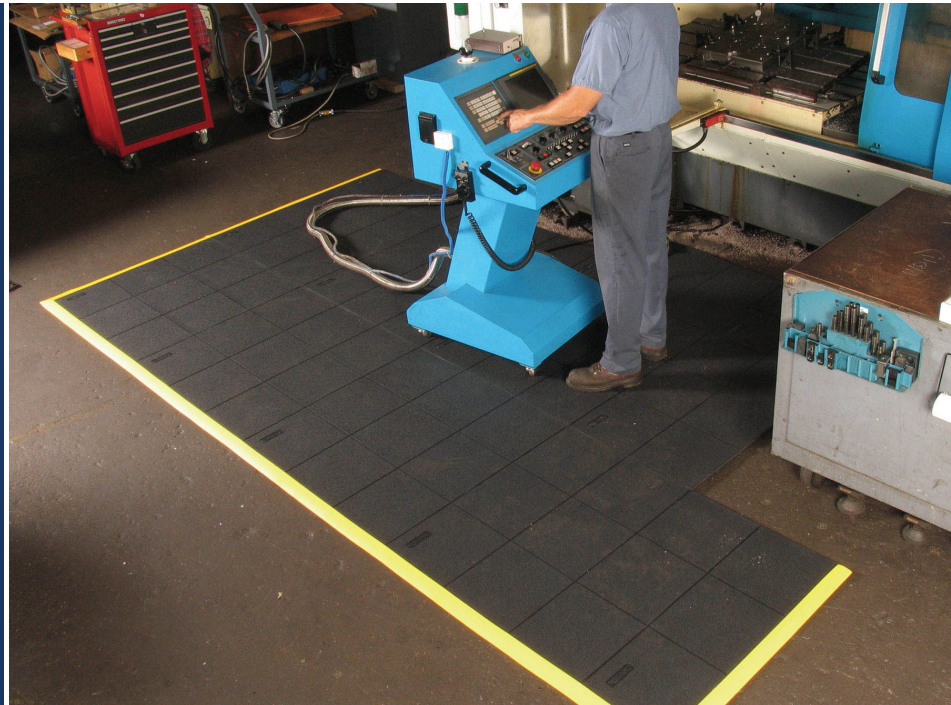

A PRODUCT OF:



Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers and eye/face washes, matting, and vehicle safety equipment. Learn more at Justrite.com, Checkers-safety.com, and Notrax.com.