




Environmentally friendly, made from post consumer bias-ply tires. Attractive carpet-like surface provides a touch of luxury in areas of frequent foot traffic. Traps dirt, absorbs moisture, and protects floors. Easily maintained with vacuum cleaner or hose. Suitable for any entrance or as wall to wall floor covering. Meets Federal flammability regulations DOC FF 1-70. According to AMCIC Test, Dura-Tile exceeds the minimum char radius of 3" Average car, per 8 strips tested, .75" radius.

Material: Rubberized fabric strips with chenille-like surface cut from recycled tires bonded to non-flammable base.

Thickness: 3/8" (with +1/8 ~ 0")

Nosing (optional): Black beveled vinyl nosing for finished approaches on surface installation.

Colors:

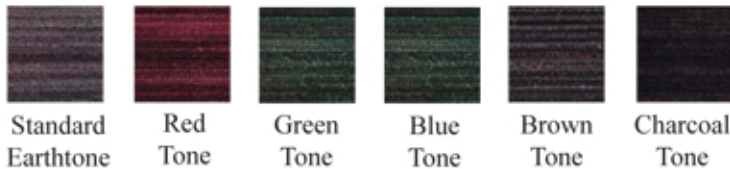

Ordering Information

Dura-Tile II & Dura-Tile Rolls™

Item No.	Size	Weight
345S1212	12" x 12"	2.3 lbs./sq.ft.
345R0025	12" x 25"	2.3 lbs./sq.ft.
345C0000	12" x up to 25'	2.3 lbs./sq.ft.

Colored Dura-Tile II™

Item No.	Size	Weight
345S1212	12" x 12"	2.3 lbs./sq.ft.

Adhesive & Nosing

Item No.	Description	Weight
345A0001	1 gallon can adhesive	9 lbs. ea.
345B0000	Beveled Nosing	0.4 lbs./sq.ft.

Dura-Tile II
95% Recycled Content

Size	Rubber/Tile	Tires/Tile	1 Tire
12" x 12"	2 lbs.	.07	15 Tiles

1 Tire = 30 lbs.

